



Your Power House  
VP ELECTRONIQUE

Doc. EA-0204

# SPX-6200-GP1/SPX-6250-GP1

200W/250W, Six Output

For 1U System

ATX12V Power supply



180 x 100 x 40.5 mm  
7.09 x 3.94 x 1.60 inch



CE

## Features:

- \* Universal full range AC input with active PFC, P.F.> 0.95
- \* High efficiency and reliability
- \* Altitude during operation up to 4000M
- \* Built-in long life ball bearing fan
- \* 3.3V & 5V VRM design
- \* Over voltage, over load & short circuit, over current, over temperature protection
- \* With power good signal & PS-ON signal output
- \* Meet Intel ATX 2.01 / ATX2.31 / ATX 12V
- \* 3 years warranty

## Specification:

INPUT	Voltage	90V ~ 264VAC universal full range or 127V ~ 375VDC									
	Frequency	47 ---- 63 Hz.									
	Current	SPX-6200-GP1 <2.8A @ 100VAC input, full load condition									
		SPX-6250-GP1 <3.5A @ 100VAC input, full load condition									
	Inrush Current(TYP.)	40A@115V , 60A@230V AC input, Cold start, at 25°C ambient									
	Leakage Current	<1.5mA@264V AC input									
OUTPUT	Power Factor	PF > 0.95									
	Voltage	5V	3.3V	12V	-12V	-5V	5Vsb				
	Min Load	0.3A	0A	0.2A	0A	0A	0A				
	Max Load	SPX-6200-GP1 SPX-6250-GP1	20A	25A	12A 16A	0.5A Peak Load 1.5A ⑥	0.5A 3A				
	Output Tolerance ②	±3%	±5%	±3%	±10%	±5%	±5%				
	Ripple Noise MAX. ③	70mV	70mV	120mV	120mV	100 mV	70 mV				
	Efficiency (TYP.)	83%									
PROTECTION	Output MAX.	SPX-6200-GP1 : 3.3V & 5V max 110W, total output max 200W SPX-6250-GP1 : 3.3V & 5V max 110W, total output max 250W									
	Over Voltage	5.4V~6.8V	3.7V~4.1V	13.1V~14.5V	---	---	---				
		Shutdown and latch off, recover after re-start up.									
	Over current (MAX)	30A	30A	20A	----	----	----				
ELEC. CHAR.	OverLoad & Short Circuit	When power supply over 105%~ 150% max load or short circuit acted, power supply will be shutdown and latch off, recover after re-start up.									
	Over Temperature	Over 95°C ± 5°C Shutdown, recovers automatically after fault condition has been removed.									
ENVIRONMENT	Rise time	<20mS									
	Hold up time	>16mS@230V									
	Power Good signal	Power on within 100~500ms, high level TTL signal release.									
	PS-ON signal	P/S ON: PS-ON=Low or <0.8V, P/S OFF: PS-ON=Hi or >2V									
SAFETY	Temperature ④	Operating: -10~70°C ; De-rating: 50~70°C : 2.5%/°C . ; Storage: -20~+85°C									
	Humidity	Operating: 20% ~ 90% RH (non condensing) ; Storage: 10% ~ 95% RH (non condensing)									
	Altitude	13124ft ( ≈ 4000m ) operating									
EMC	Withstand voltage	I/P-O/P:3.0KVAC, I/P-PE:1.5KVAC, 1minute									
	Isolation resistance	I/P-O/P, I/P-PE >100MΩ/500VDC at 25°C / 70% RH									
	Safety standard	UL 60950-1 2 <sup>nd</sup> , CSA C22.2 No. 60950-1-07 2 <sup>nd</sup> ,TUV EN 60950-1:2006+A11+A1+A12+A2,IEC 60950-1:2005+A1+A2, approved									
OTHERS	EMI	EN 55032 CLASS B, FCC CFR 47 PART 15 CLASS B, CNS 13438 CLASS B.									
	EMS	Compliance to EN61000-3-2 CLASS D, EN61000-3-3									
	Cooling	Forced airflow cooling with a DC fan.									
NOTE	M.T.B.F.	108.7 K hours									
	Dimension	180 x 100 x 40.5 mm (L*W*H)									
	PACKING	N.W.: 1.17 KG / 1PC; 12 PCS / 2.02 CUFT / 1 CTN									
<p>① All measurements which not mentioned are based on 230VAC input, <b>output max</b> at ambient 25°C / 70%RH</p> <p>② Output tolerance included set up voltage, line regulation and load regulation.</p> <p>The regulation is measured between 20%-100% <b>max load</b> of each output, Total output must under <b>output Max</b>.</p> <p>③ Ripple &amp; noise are measured at 10~50°C condition and 20MHz of bandwidth by using a 10" ~ 15" twisted pair-wire terminated with a 0.1uF &amp; a 10uF parallel capacitor.</p> <p>④ The operating temperature shall follow the de-rating curve in spec</p> <p>The output load may be requested for decreasing as de-rating curve in spec when low input voltage is under 100VAC</p> <p>⑤ The power supply is considered a component of end-equipment. The end-equipment must be re-confirmed whether comply with EMC directives.</p> <p>⑥ 33% duty cycle maximum within every 10 seconds, average output power should not exceed the <b>Max.</b> load</p> <p>⑦ Start up steps : Connect AC or DC source, before you turn on the power supply. The unit can't be operated by PS-ON and GND are shorted before power supply turns on. Please contact us for different requirement.</p>											




Your Power House  
VP ELECTRONIQUE


Doc. EA-0204

# SPX-6200-GP1/SPX-6250-GP1

De-rating Curve :

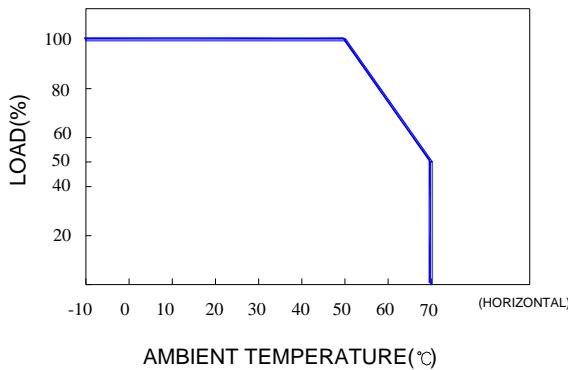

Output De-rating Vs Input Voltage :

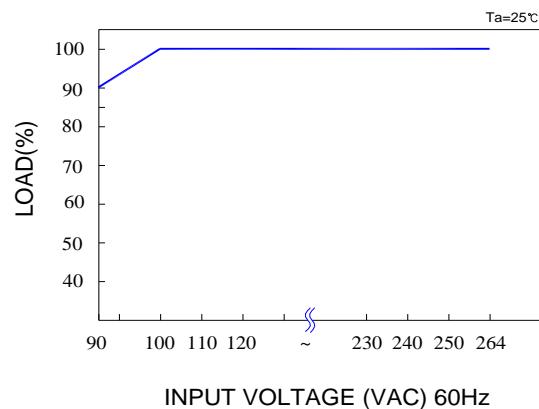

Dimension:

(Unit: mm)

## SPX-6200-GP1/SPX-6250-GP1

